




**RAYCO...Setting The Industry Standard**

**Call Us at 1-800-392-2686**

Friday, September 22, 2006

- Home
- Contact Us
- Products
- Literature
- Events
- Financing
- Apparel Etc.
- Company Info
- Used Equipment

# LS 2526

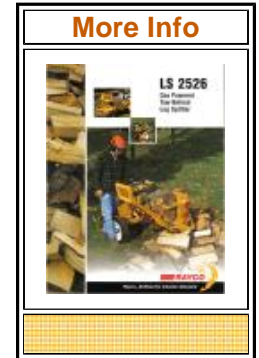

The LS 2526 log splitter was designed to complement the **RAYCO** line of high performance, low maintenance stump cutters. This commercial grade machine is built on an electrically welded chassis of structural steel. Power is provided by a reliable, 13 HP Honda engine that develops 2500 psi of pressure and 25 tons of force. Special features include 600 lb. log lift, auto cycle, and hydraulic wedge lift. This machine gives the professional contractor a powerful job site tool that is always ready to go to work.

**UPCOMING EVENTS**

**WAYNE COUNTY FAIR**  
 Wooster, OH  
 Sat. Sept. 9, 2006  
 thru  
 Thu. Sept. 14, 2006

-----

**PAUL BUNYAN**  
 Cambridge, OH  
 Fri. Oct. 6, 2006  
 thru  
 Sun. Oct. 8, 2006

| <b>LS 2526 Log Splitter - DATA SPECS</b> |   |
|--|---|
| <b>Specifications</b>                    |   |
| <b>Weight</b>                            | 1100 lbs                                    |
| <b>Length</b>                            | 102 inches                                  |
| <b>Height</b>                            | 44 inches                                   |
| <b>Width</b>                             | 59 inches                                   |
| <b>Chassis</b>                           | Electrically welded formed structural steel |
| <b>Tires</b>                             | 4.80-12                                     |
| <b>Engine</b>                            | Honda GX390, 1 cylinder                     |
| <b>Power Rating</b>                      | 13 HP                                       |
| <b>Fuel</b>                              | 1.72 gallons                                |
| <b>Cutting</b>                           | 4-way, 1-way                                |
| <b>Log Length</b>                        | 24 inches 4-way, 26 inches 1-way            |
| <b>Beam</b>                              | 8 inches                                    |
| <b>Ram</b>                               | 2 inch rod x 5 inch bore                    |
| <b>Cycle Time</b>                        | 10 seconds, total                           |
| <b>Flow</b>                              | 22 gpm                                      |
| <b>Pressure</b>                          | 2500 psi                                    |
| <b>Tonnage</b>                           | 25 tons                                     |
| <b>HR Capacity</b>                       | 14 gallons                                  |

Towing Capacity 2 inch ball